MARINE BATTERIES


DSAM8D 11 MF DM




MECHANICAL SPECIFICATIONS

Group Size	8D (H52 / N200)
Terminal Type	Marine Dual
L x W x H x TH [in]	20.6 x 10.9 x 8.8 x 10.5 in
L x W x H x TH [mm]	524 x 278 x 225 x 266 mm
Weight [lbs / kg]	110.74 lbs / 50.23 kg
Case Material	Polypropylene
Cover	Polypropylene
Handle	Polypropylene
Hold Down	B00
Cell Layout	3


BATTERY DIAGRAMS

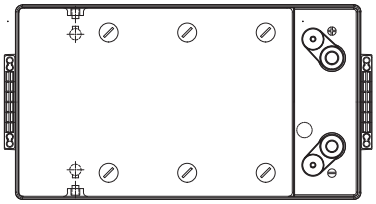

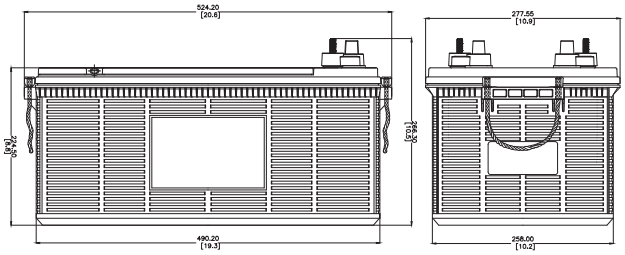


Terminal Type: Marine Dual

Hold Down: B00



TERMINAL DETAILS
SCALE: 1.5 : 1



ELECTRICAL SPECIFICATIONS

Voltage (V)	12V
Cold Cranking Amps (CCA)	1100
Cranking Amps (CA)	1375
Reserve Capacity (RC) @25A	175 min
C20 (Ah)	208
Internal Resistance (mΩ)	3.35 mΩ

CHARGE DISCHARGE AND TEMPERATURE

Self-Discharge/Month 68°F (20°C)	2.9%
Self-Discharge/Month 104°F (40°C)	5.6%
Operating Temperature (Range)	-4°F/-20°C to 122°F/50°C
Storage Temperature (Range)	-4°F/-20°C to 104°F/40°C

CHARGE VOLTAGES

CHARGE STAGE	12V	24V	36V	48V
Bulk	14.4-14.7V	28.4-29.4V	42.6-44.1V	56.8-58.8V
Absorption	14.2-14.7V	28.4-29.4V	42.6-44.1V	56.8-58.8V
Float	13.2 V-13.6V	26.4V- 27.2V	39.6V-40.8V	52.8-54.4V

TC Factor: (-2mV°F/cell) or (-4 mV°C/cell)

2700 Carrier Ave., Commerce, CA 90040 | Email: customerservice@ramcarbatteries.com | Phone: (323) 726-1212

©2025 RAMCAR BATTERIES. All rights reserved. Trademark and logos are property of RAMCAR and its affiliates unless otherwise noted. Subject to revisions without notice.
RAMCAR BATTERIES is not liable for damages arising from information in or omitted from this document.